



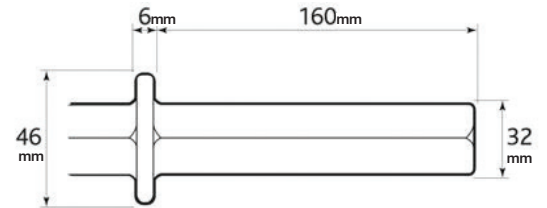

BREAKER STEELS PNEUMATIC & HYDRAULIC 32 X 160 MM

(1-1/4" x 6-1/4") Hex Shank

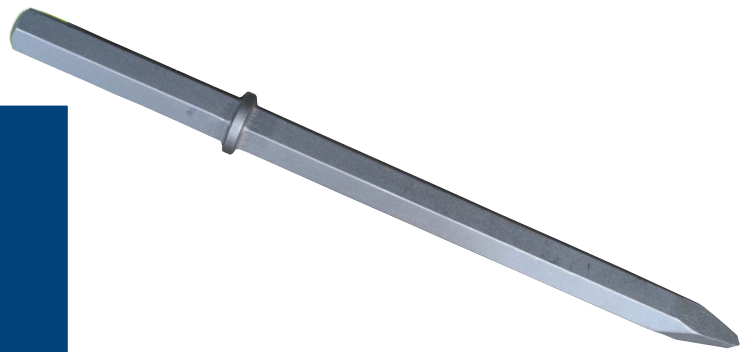


HOW TO SELECT YOUR DURO BREAKER STEEL


1. Choose the kind of application you need to undertake and therefore the breaker steel type you need to achieve.
2. Then select the machine type you will be using - pneumatic or electric



FOR EXAMPLE:
75MM WIDE
CHISEL



REQUIRED
TO BE USED
WITH A
32X160
HEX SHANK
BREAKER



EXCELLENT PERFORMANCE & OUTPUT



KEY TO BREAKER STEEL TYPES

MOIL POINT




For demolition work & starting holes in centres of concrete slabs. General breaking where there is not a requirement to control the line of fracture. Drop forged high grade steel, heat treated.

WIDE CHISEL / BOLSTER CHISEL



Used in similar way to moil point but line of fracture is controlled along the line of the chisel end. Used on applications where it is important to have a clean edge retained on the work-piece to be broken.

115 mm WIDE TARMAC CUTTER



Tarmac Cutter used for cutting of coated stone. The wedge shape of the side profile is preferred by many operators as it facilitates easy removal of the blade after each cut.

STEM - Use with floor cleaning tools and pads



Stem for floor cleaning tool is available with different shank types and facilitates the use of the smaller electric tamping pads and especially the floor cleaning tool.

POINT



For general breaking where there is not a requirement to control the line of fracture.

STEM - Use with 180 mm dia tamping pad




Used together the stem can have a number of shank configurations to suit both Pneumatic and Electric powered breakers. Pad is selected to suit type of compaction operation required - for back filling following emergency repairs to services or compaction of mould in industrial applications.

NARROW CHISEL



Used in a similar way to moil point but line of fracture is controlled along line of the chisel end. Used on applications where it is important to have a clean edge retained on the work-piece to be broken.

CLAY SPADE



For cutting / digging of boulder clay. Cutting action returns to an open face. If edge is damaged during use it will destroy natural scooping action. Favoured by tunnelling contractors & companies specialising in underpinning in clay conditions. Also excellent for general garden and landscaping.

125 mm WIDE ASPHALT CUTTER



Asphalt Cutter - similar in application to the Tarmac Cutter but has the benefit of a thinner parallel side profile and radius on the blade allowing faster penetration in the cutting action. Suitable for lighter weight and less powerful breakers.

TAMPING PAD - 160 mm dia



Floor compaction tool for use with a stem

SCUTCH COMB HOLDER



For scutching operations using power tools instead of hand held - interchangeable scutch ends mean no sharpening is necessary. Can also be used with 'doves'.

FLOOR CLEANING TOOL



Used in conjunction with a shank to suit the type of breaker to be used. Flexible replacement blade held in place by retaining bolts. For removal of lint tiles or debris spilt on to concrete floors prior to finishing.

SIZES

Point - 380 mm	32.0x160HX-MP380
Point - 450 mm	32.0x160HX-MP450
40 mm Wide Chisel - 380 mm	32.0x160HX-NC380
40 mm Wide Chisel - 450 mm	32.0x160HX-NC450
115 mm Wide Tarmac Cutter	32.0x160HX-115WTC300
Clay Spade - 135 x 205 mm Blade	32.0x160-DU-HX-115WTC300
400 mm Stem Use With 160 mm Pad	32.0x160HX-STEM

Lengths Are Under Collar

AN EXTENSIVE RANGE OF PNEUMATIC, HYDRAULIC & ELECTRIC BREAKERS AVAILABLE

- > Unrivalled quality & market leading tool life
- > Comprehensive service & support
- > Two exclusive brands



ORDER LINE: 01909 552470

EMAIL: info@duro-yokota.co.uk

[WWW.DURO-DIAMONDS.COM](http://www.duro-diamonds.com)