



DIAMOND BLADES DPCM-T CONSTRUCTION MATERIALS & METAL MULTIPLE MATERIALS



APPLICATIONS - CONSTRUCTION MATERIALS & METAL

SMALL METAL SECTIONS	
SMALL STEEL SECTIONS	
SG & GREY IRON	
PORCELAIN	
INDIAN STONE & GRANITE	
MARBLE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
REINFORCED CONCRETE - HEAVY	
REINFORCED CONCRETE - MEDIUM	
REINFORCED CONCRETE - LIGHT	
CONCRETE PRODUCTS	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
GENERAL BUILDING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
ASPHALT OVER CONCRETE	
GREEN CONCRETE	
CEMENT SCREED	
CELLULAR CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT	
ABRASIVE MORTAR	

- ☐ HIGHLY SUITED
- ☐ SUITABLE WITH RESERVATIONS
- ☐ NOT SUITABLE

SIZES & MOST RELEVANT MACHINE TYPE

DIMENSIONS	DPCM-T
(4½") 115 x 22.23	115DPCM-T
(5") 125 x 22.23	125DPCM-T
(7") 230 x 22.23	230DPCM-T
(12") 300 x 20.00	300DPCM-T
(14") 350 x 20.00	350DPCM-T

VALUE TWIN PACKS

300DPCM-T is also available as part of a twin pack containing:
1 x 300DPCM,
1 x 300DPCM-T &
2 x 1 shot bottles of 2 stroke oil



ALTERNATIVE PRODUCTS




DUM/S



DCM-T



DSBM-T

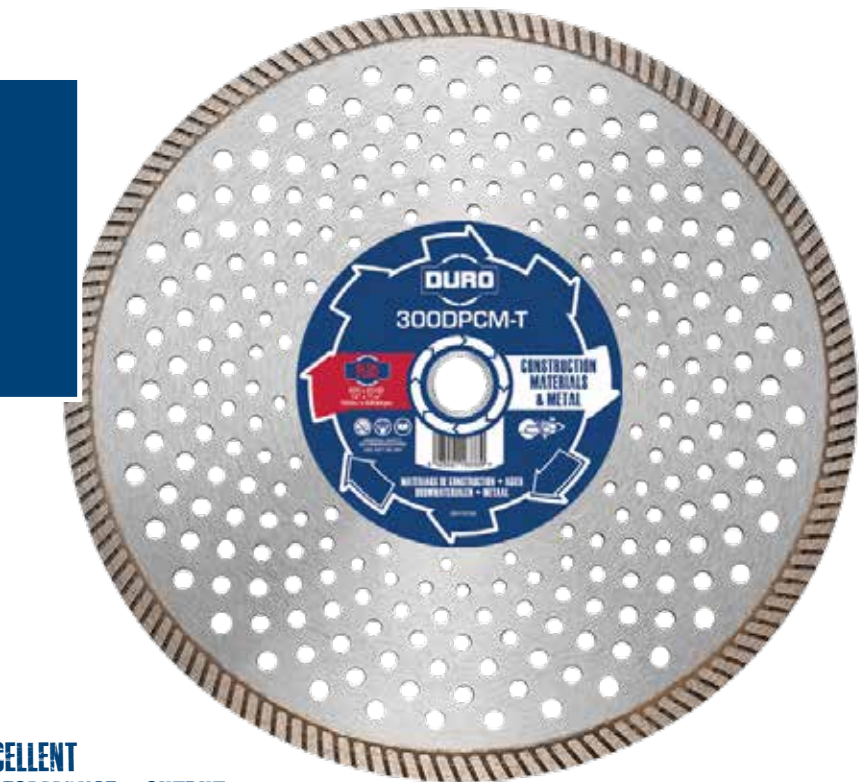

EXCELLENT PERFORMANCE & OUTPUT




USE ME FOR

All concrete types Inc. heavily reinforced
All bricks including class A / Indian stone / granite / marble stone and quartzite
Occasional use in small metal sections / porcelain abrasive materials and asphalt

FEATURES

- Segments > 10 mm continuous turbo rim
- Core > Ventilated with reinforced flange
- Gullets > Turbo rim
- Adhesion > Sintered - Hot pressed
- Perform > Excellent speed of cut & output
- Other > Less chipping & increased stability

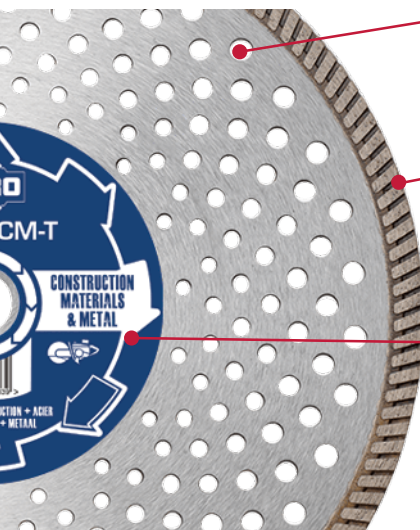

COOLING HOLES

Keep the steel core cool and will prevent distortion of that core. Keeping the diamond matrix cool in segments will improve speed and life

10MM CONTINUOUS TURBO RIM

Less chipping than with segmented blades. Faster cutting due to castellation of rim. Clears debris quicker and keeps blade cool by trapping air in motion

REINFORCED FLANGE

Stability under extreme use and keeps steel core in line, therefore giving a cleaner, straighter cut



DIAMOND BLADES DPCM CONSTRUCTION MATERIALS



APPLICATIONS - CONSTRUCTION MATERIALS

SMALL METAL SECTIONS	
SMALL STEEL SECTIONS	
SG & GREY IRON	
PORCELAIN	
INDIAN STONE & GRANITE	
MARBLE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
REINFORCED CONCRETE - HEAVY	
REINFORCED CONCRETE - MEDIUM	
REINFORCED CONCRETE - LIGHT	
CONCRETE PRODUCTS	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
GENERAL BUILDING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
ASPHALT OVER CONCRETE	
GREEN CONCRETE	
CEMENT SCREED	
CELLULAR CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT	
ABRASIVE MORTAR	

- ☐ HIGHLY SUITED
- ☐ SUITABLE WITH RESERVATIONS
- ☐ NOT SUITABLE

SIZES & MOST RELEVANT MACHINE TYPE

DIMENSIONS	DPCM
(6") 150 x 22.23 mm	150DPCM
(9") 230 x 22.23 mm	230DPCM
(12") 300 x 20.00 mm	300DPCM
(14") 350 x 20.00 mm	350DPCM

VALUE TWIN PACKS

300DPCM with a 300DPCM-T as part of a Twin Pack

BPCM-BTS-S BATTERY SAW OPTION AVAILABLE



ALTERNATIVE PRODUCTS



DUSCM



DUCM-SILENT



DCM



EXCELLENT PERFORMANCE & OUTPUT



USE ME FOR

All concrete products Inc. heavily reinforced
All bricks including class B engineering
Hard York stone and quartzite
Occasional use in Indian stone / granite / marble / class A engineering bricks / abrasive materials and asphalt

FEATURES

- Segments > 17mm conical turbo
- Core > Ventilated / Shot-blasted
- Gullets > 30°
- Adhesion > Laser welded
- Perform > Excellent speed of cut & output
- Other > Core protection / Fast clearance / Less chipping



COOLING HOLES

Keep the steel core cool and prevent distortion of core. Keeping the diamond matrix cool in segments will improve speed and life

30° GULLETS

In line, 30° gullets help clear debris faster and they improve life as a result

17MM TURBO SEGMENTS

Castellated turbo segments achieve:
• Incredible speed of cut • Smooth cutting action
• 17mm segment height for long life • Quick start up
• Laser welding for segment safety

CONICAL SEGMENTS

Lower vibration thanks to consistent gap between segments. Increase in product life thanks to greater size of segment & decrease in noise due to less air distortion in motion

SHOT-BLASTED CORE

Undercut protection

ORDER LINE: 01909 552470

EMAIL: INFO@DURO-YOKOTA.CO.UK

WWW.DURO-DIAMONDS.COM

ORDER LINE: 01909 552470

EMAIL: INFO@DURO-YOKOTA.CO.UK

WWW.DURO-DIAMONDS.COM