KEY TO BREAKER STEEL TYPES

MOIL POINT

For demolition work & starting holes in centres of concrete slabs. General breaking where there is not a requirement to control the line of fracture. Drop forged high grade steel, heat treated.

WIDE CHISEL / BOLSTER CHISEL



Used in similar way to moil point but line of fracture is controlled along the line of the chisel end. Used on applications where it is important to have a clean edge retained on the work-piece to be broken.

CLAYSPADE



For cutting / digging of boulder clay. Cutting action returns to an open face. If edge is damaged during use it will destroy natural scooping action. Favoured by tunnelling contractors & companies specialising in underpinning in clay conditions. Also excellent for general garden and landscaping.

TAMPING PAD - 160 mm dia



Floor compaction tool for use with a stem

POINT

For general breaking where there is not a requirement to control the line of fracture.

FLOOR CLEANING TOOL



Used in conjunction with a shank to suit the type of breaker to be used. Flexible replacement blade held in place by retaining bolts. For removal of lino tiles or debris spilt on to concrete floors prior to finishing.

NARROW CHISEL

Used in a similar way to moil point but line of fracture is controlled along line of the chisel end. Used on applications where it is important to have a clean edge retained on the work-piece to be broken.

115 mm WIDE TARMAC CUTTER



Tarmac Cutter used for cutting of coated stone. The wedge shape of the side profile is preferred by many operators as it facilitates easy removal of the blade after each cut.

125 mm WIDE ASPHALT CUTTER



Asphalt Cutter - similar in application to the Tarmac Cutter but has the benefit of a thinner parallel side profile and radius on the blade allowing faster penetration in the cutting action. Suitable for lighter weight and less powerful breakers.

STEM - Use with 180 mm dia tamping pad



Used together the stem can have a number of shank configurations to suit both Pneumatic and Electric powered breakers. Pad is selected to suit type of compaction operation required - for back filling following emergency repairs to services or compaction of mould in industrial applications.

SCUTCH COMB HOLDER

For scutching operations using power tools instead of hand held - interchangeable scutch ends mean no sharpening is necessary. Can also be used with 'droves'.

STEM - Use with floor cleaning tools and pads

Stem for floor cleaning tool is available with different shank types and facilitates the use of the smaller electric tamping pads and especially the floor cleaning tool.

ULTRA 32 X 160 MM (1-¼" x 6-¼") HEX SHANK

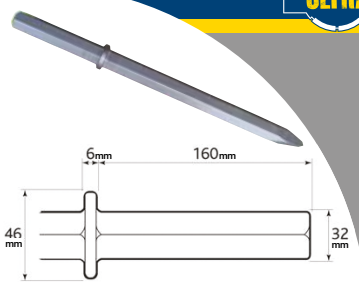

DESCRIPTION

Moil Point - 380 mm Under Collar	32.0x160-DU-HX-MP380
Moil Point - 450 mm Under Collar	32.0x160-DU-HX-MP450
Narrow Chisel - 380 mm Under Collar	32.0x160-DU-HX-NC380
Narrow Chisel - 450 mm Under Collar	32.0x160-DU-HX-NC450
115 mm Wide Tarmac Cutter	32.0x160-DU-HX-115WTC300

Made In UK

NEW

See 25 & 30kg Pavement Breakers on Page 194/195

PLUS 32 X 160 MM (1-¼" x 6-¼") HEX SHANK

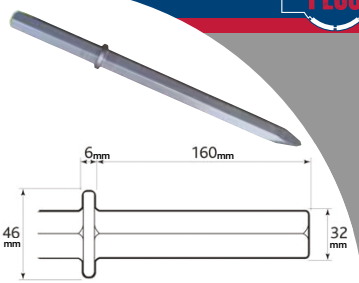

DESCRIPTION

Moil Point - 380 mm Under Collar	32.0x160HX-MP380
Moil Point - 450 mm Under Collar	32.0x160HX-MP450
Narrow Chisel - 380 mm Under Collar	32.0x160HX-NC380
Narrow Chisel - 450 mm Under Collar	32.0x160HX-NC450
75 mm Wide Chisel	32.0x160HX-75WC380
115 mm Wide Tarmac Cutter	32.0x160HX-115WTC300
Clayspade - 135 x 205 mm Blade	32.0x160HX-135x205CS
400mm Stem Use With 160 mm Pad	32.0x160HX-STEM

PLUS 28 X 160 MM (1-1/8" x 6-¼") HEX SHANK

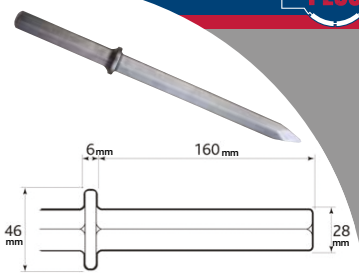

DESCRIPTION

Moil Point - 380 mm Under Collar	28.0x160HX-MP380
Moil Point - 450 mm Under Collar	28.0x160HX-MP450
Narrow Chisel - 380 Under Collar	28.0x160HX-NC380
Narrow Chisel - 450 Under Collar	28.0x160HX-NC450
75 mm Wide Chisel	28.0x160HX-75WC380
115 mm Wide Tarmac Cutter	28.0x160HX-115WTC300

PLUS 25 X 108 MM (1" x 4-¼") HEX SHANK

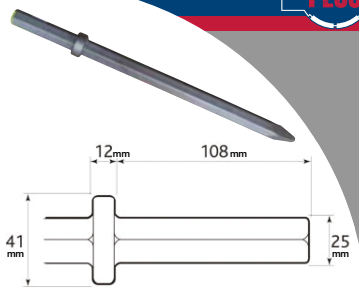

DESCRIPTION

Moil Point - 380 mm Under Collar	25.0x108HX-MP380
Moil Point - 450 mm Under Collar	25.0x108HX-MP450
Narrow Chisel - 380 mm Under Collar	25.0x108HX-NC380
Narrow Chisel - 450 mm Under Collar	25.0x108HX-NC450
115 mm Wide Tarmac Cutter	25.0x108HX-115WTC300

See 20 & 25 Heavy Duty Hammers on Page 194

PLUS 22 X 82 MM (7/8" x 3-1/4") HEX SHANK

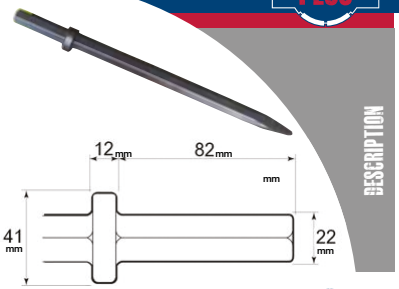

DESCRIPTION

Moil Point - 380mm Under Collar	22.0x82HX-MP380
Moil Point - 450mm Under Collar	22.0x82HX-MP450
Narrow Chisel - 380 mm Under Collar	22.0x82HX-NC380
Narrow Chisel - 450 mm Under Collar	22.0x82HX-NC450
125 mm Wide Asphalt Cutter*	22.0x82HX-125WTC300
Clayspade - 100 x 160 mm Blade	22.0x82HX-CS

* 300 mm Under Collar

See 10 & 12kg Heavy Duty Hammers on Page 192/193

PLUS 19 X 50MM (3/4" x 2") HEX SHANK

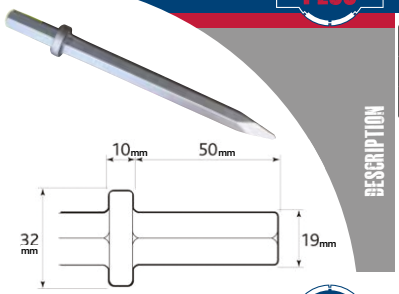

DESCRIPTION

Moil Point - 250 mm Under Collar	19.0x50HX-MP250
Narrow Chisel - 250 mm Under Collar	19.0x50HX-NC250
60 mm Wide Chisel*	19.0x50HX-60WC230

* 230 mm Under Collar

See 5, 7 & 8kg Light Duty Hammers on Page 190/191

PLUS 25 X 75 MM ROUND SHANK

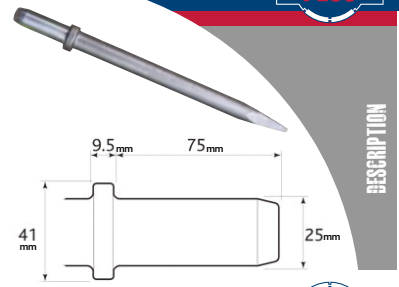

DESCRIPTION

Moil Point - 330 mm Under Collar	25.0x75RS-MP330
Narrow Chisel - 330 mm Under Collar	25.0x75RS-NC330

See 10 & 12kg Heavy Duty Hammers on Page 192/193

PLUS CP9S SHANK BALL RETAINER CHUCK

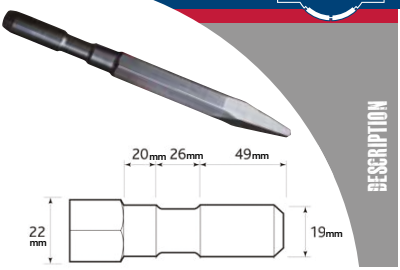

DESCRIPTION

Point - 250 mm o/a Length	CP9S-P250
Narrow Chisel - 250 mm o/a	CP9S-NC250
75 mm Wide Chisel - 250 mm o/a	CP9S-WC250

PLUS KANGO 900/950

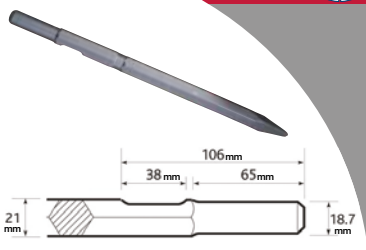

DESCRIPTION

Moil Point - 380 mm length	K900/950 - MP380
Narrow Chisel - 380 mm length	K900/950 - NC380
75 mm Wide Chisel - 300 mm length	K900/950 - 75WC300
Floor Cleaning Tool Stem - 275 mm	K900/950 - STEM
Clayspade - 100 x 165 mm Blade	K900/950 - CSPADE
Scutch Comb Holder	K900/950 - SCHOLDER

PLUS HILTI 905 & 1000

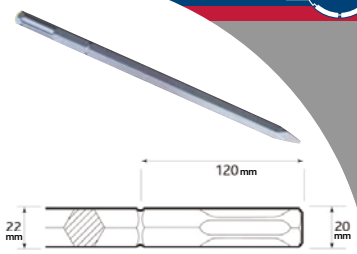

DESCRIPTION

Moil Point - 500 mm length	H905/1000 - MP500
Narrow Chisel - 500 mm length	H905/1000 - NC500
75 mm Wide Chisel - 350 length	H905/1000 - 75WC350
Clayspade - 100 x 165 mm Blade	H905/1000 - CSPADE
Floor Cleaning Tool Stem - 275 mm	H905/1000 - STEM

PLUS HILTI 2000

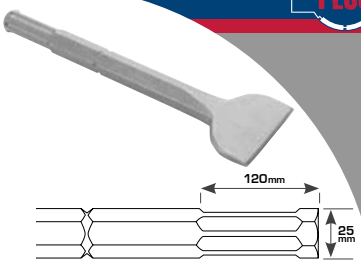

DESCRIPTION

Moil Point - 500 mm length	H2000 - MP500
Narrow Chisel - 500 mm length	H2000 - NC500
Wide Chisel - 300 mm length	H2000 - 75WC300

NEW

PLUS HILTI 3000

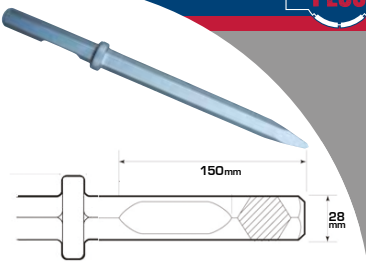

DESCRIPTION

Moil Point - 520 mm length	H3000 - MP520
Narrow Chisel - 520 mm length	H3000 - NC520
115 mm Wide Tarmac Cutter	H3000 - 115WTC

PLUS HILTI 3000 QUICK RELEASE

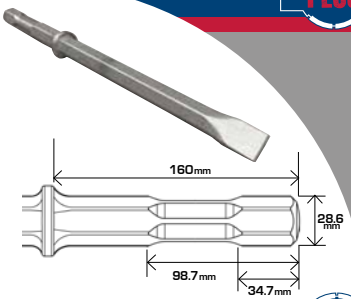

DESCRIPTION

Moil Point - 510 mm length	H3000 – MP510 - QR
Narrow Chisel - 510 mm length	H3000 - NC510 - QR
80mm Extra Wide Chisel	H3000-EWC80 - 510 - QR

NEW

Made In UK

PLUS BOSCH 11205

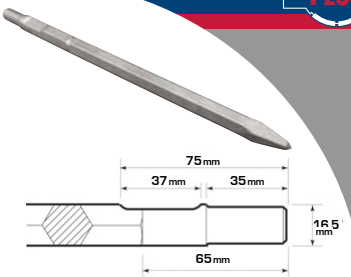

DESCRIPTION

Moil Point - 380 mm length	B11205 - MP380
Narrow Chisel - 450 mm length	B11205 - NC450

PLUS BOSCH 11304 USH 27



DESCRIPTION

Moil Point - 450 mm length	B11304 - MP450
Narrow Chisel - 450 mm length	B11304 - NC450
115 mm Wide Tarmac Cutter	B11304 - 115WTC

AN EXTENSIVE RANGE OF PNEUMATIC BREAKERS AVAILABLE ON PAGES 190-198

> Unrivalled quality & market leading tool life
> Comprehensive service & support
> Two exclusive brands

YOKOTA

LIGHTWEIGHT HAMMERS

HEAVY DUTY HAMMERS

PAVING BREAKERS

DURO PLUS VARIOUS MACHINES

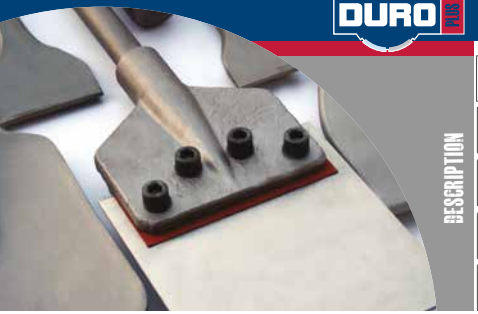

DESCRIPTION	
160 mm square tamping pad for use with 32 x 160mm stems	160mm DIAMETER PAD
Floor cleaning head & blade for use with H905 / SMAX / K900 stems	FLOOR CLEANING TOOL
Spare 2 mm blade for floor cleaning tool	CLEAN TOOL BLADE
Single bolt, 2 x washers & nut for floor cleaning tool	CLEAN TOOL BOLT SET
Bush hammer head for use with H905 / SMAX / K900 stems	50mm BUSH HAMMER H'd

STEMS
H905

SDS MAX K900

ACCESSORIES

FLOOR CLEANING TOOL COMPONENTS

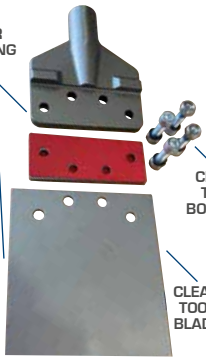

50mm BUSH HAMMER HEAD



STEMS
32X160

ACCESSORIES

160MM PAD

EXTENSIVE RANGE OF FLOOR SCRAPERS AND STRIPPERS AVAILABLE ON PAGES 212 - 213

> Unrivalled quality & market leading tool life
> Comprehensive service & support