BREAK IT

DURO


LIGHT DUTY HAMMERS
THA-2BRH & THA-4BRH
5KG



TOKU

Type	THA-2BRH	THA-4BRH
Brand	TOKU	TOKU
Shank size mm	⬣ 19 x 50	⬣ 19 x 50
Bore diameter mm	28.5	28.5
Stroke mm	51	102
Blows p/min	2,300	1,800
J/Blow	15.7	31.8
Air cons. l/s	14.2	15.8
Weight kg	6.8	7.8
Inlet thread	PT 3/8"	PT 3/8"
Hose diameter mm	13	13
Vibration m/s²	11.6	11.6
Noise level dB(A)	93	93

Type	A mm	B mm
THA-2BRH19x50	350	87
THA-4BRH19x50	430	87

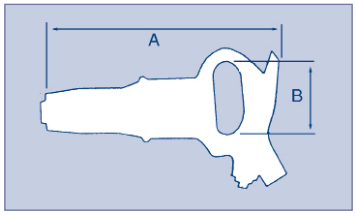

ELV - Daily Exposure Limit Value
EAV - Daily Exposure Action Value

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
THA-2BRH	1.29	0.22
THA-4BRH	1.29	0.22

THA-2BRH / THA-4BRH

- Sub 7kg Chipping hammer (THA-2BRH)
- Sub 8kg Chipping hammer (THA-4BRH)
- 19 x 50mm Hex shank
- Open grip handle for ease of use
- Ideal for both foundry & rebar work
- Fitted with solid steel screw retainer for use with pointed and wide cutting chisels



AVAILABLE STEELS



Moil Point / Point
Drop forged of high grade steel, this hammer iron with heat treated work areas is used for demolition work and starting holes in the centre of a concrete slab. The most common of the demolition steels used for general breaking where there is not a requirement to control the line of fracture.

Part No.
19.0x50HX-MP250



Narrow Chisel
Narrow Chisel is used in a similar way to the Moil Point but the line of fracture is controlled along the line of the chisel end. Used on applications where it is important to have a clean edge retained on the work piece being broken.

Part No.
19.0x50HX-NC250



Wide / Bolster Chisel
Wide Chisel is used in a similar way to the Moil Point but the line of fracture is controlled along the line of the chisel end. Used on applications where it is important to have a clean edge retained on the work piece being broken.

Part No.
19.0x50HX-60WC250

REPAIR & SERVICE DEPARTMENT

REPAIR & SERVICE DEPT.

From the DURO Yokota service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service

ORDER LINE: 01909 552470
EMAIL: INFO@DURO-YOKOTA.CO.UK
DURO-DIAMONDS.COM