



AIR ROCK DRILLS TJ-15SV LBS VIBRATION CONTROL 15 kg



Vibration Control

Rock Drills With Up To
70% Less Vibration



Toku Rock Drills are fitted with vibration damping handles for less transfer to the user from the breaker steel.

Decrease potential health risks to tool operators & massively increase productivity levels.

Vibration levels up to 70% less than equivalent standard model gives significant increases in tool use before current EAV & ELV levels are reached.

Drills, Rods and
Threaded Rods
Available For
TOKU Rock Drills



Button and
Cross Heads
Available For Use
With Rods

REPAIR & SERVICE DEPARTMENT

From the DURO service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.




- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service

TJ-15SV LBS

- 15 kg Class rotary rock drill
- 22 x 108 mm hex shank
- Vibration control from damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,450 blows per minute
- Included oiler is for drilling lubricant only

TECHNICAL DATA

Type	A mm	B mm
TJ-15SV LBS	468	340

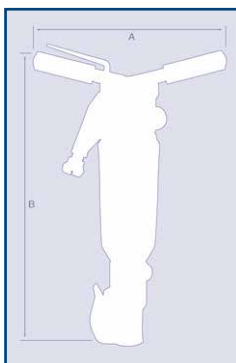

Type	TJ-15SV LBS
Brand	TOKU
Shank size mm	Hex 22 x 108
Bore diameter mm	54
Stroke mm	45
Blows p/min	2,450
RPM	250
J/Blow	44.7
Air cons. l/s	26
Weight kg	17.7
Inlet thread	PT 3/4"
Hose diameter mm	19
Vibration m/s ²	7.0
Exposure Points / hour	98
Noise level dB(A)	99

ELV - Daily Exposure Limit Value
EAV - Daily Exposure Action Value

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
TJ-15SV LBS	4.05	1.01

ALTERNATIVE PRODUCTS



TJ-20SV LBS

ORDER LINE: 01909 552470

EMAIL: INFO@DURO-YOKOTA.CO.UK

WWW.DURO-DIAMONDS.COM