DRILL IT

DURO

AIR ROCK DRILLS
TJ-20SV LBS
VIBRATION CONTROL
20 KG



Vibration Control

Rock Drills With Up To 70% Less Vibration

VIBRATION CONTROL

Toku Rock Drills are fitted with vibration damping handles for less transfer to the user from the breaker steel.
Decrease potential health risks to tool operators & massively increase productivity levels.
Vibration levels up to 70% less than equivalent standard model gives significant increases in tool use before current EAV & ELV levels are reached.



REPAIR & SERVICE DEPARTMENT

REPAIR & SERVICE DEPT.

From the DURO service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.


- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service

TJ-20SV LBS

- 20 kg Class rotary rock drill
- 22 x 108 mm hex shank
- Vibration control from damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,400 blows per minute
- Included oiler is for drilling lubricant only

TECHNICAL DATA

Type	A mm	B mm
TJ-20SV LBS	385	585

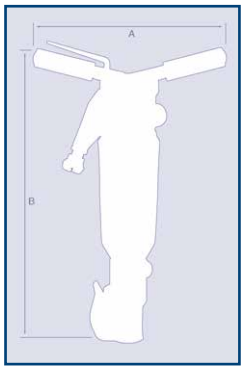

Type	TJ-20SV LBS
Brand	TOKU
Shank size mm	Hex 22 x 108
Bore diameter mm	68
Stroke mm	49
Blows p/min	2,400
RPM	200
J/Blow	72.0
Air cons. l/s	41
Weight kg	19.0
Inlet thread	PT 3/4"
Hose diameter mm	19
Vibration m/s²	10.8
Exposure Points / hour	233
Noise level dB(A)	100

ELV - Daily Exposure Limit Value
EAV - Daily Exposure Action Value

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
TJ-20SV LBS	1.43	0.26

ALTERNATIVE PRODUCTS

TOKU
TJ-15SV LBS

ORDER LINE: 01909 552470
EMAIL: INFO@DURO-YOKOTA.CO.UK
WWW.DURO-DIAMONDS.COM