




DIAMOND BLADES DCM-T CONSTRUCTION MATERIALS & METAL

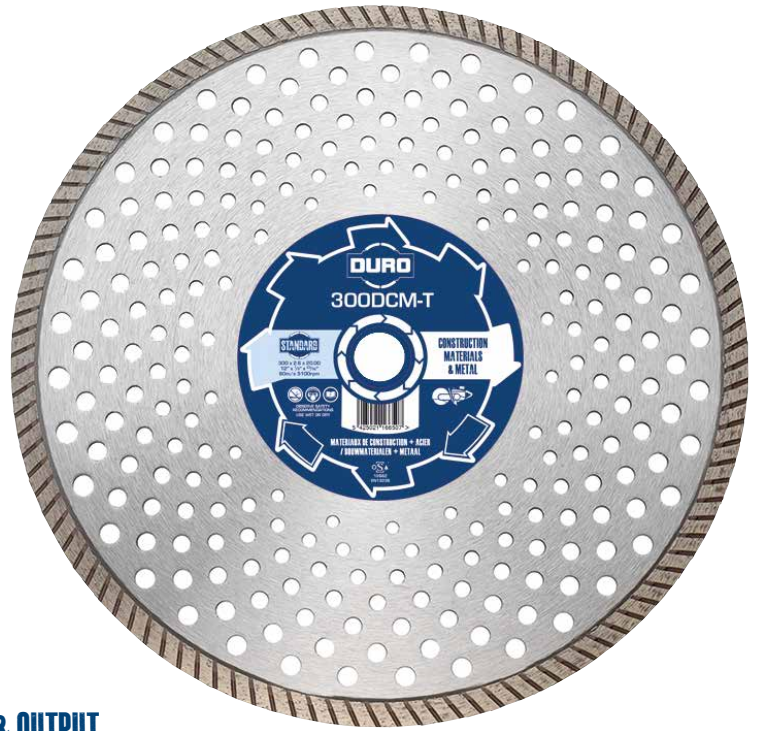


APPLICATIONS: CONSTRUCTION MATERIALS & METAL

SMALL METAL SECTIONS	
SMALL STEEL SECTIONS	
SG & GREY IRON	
PORCELAIN	
INDIAN STONE & GRANITE	
MARBLE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
REINFORCED CONCRETE - HEAVY	
REINFORCED CONCRETE - MEDIUM	
REINFORCED CONCRETE - LIGHT	
CONCRETE PRODUCTS	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
GENERAL BUILDING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
ASPHALT OVER CONCRETE	
GREEN CONCRETE	
CEMENT SCREED	
CELLULAR CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT	
ABRASIVE MORTAR	

- HIGHLY SUITED
- SUITABLE WITH RESERVATIONS
- NOT SUITABLE


GREAT PERFORMANCE & OUTPUT



USE ME FOR

All concrete types Inc. heavily reinforced
All bricks including class A / Indian stone/ granite
marble / stone and quartzite
Occasional use in small metal sections and porcelain

- FEATURES**
- Segments > 10mm continuous turbo rim
 - Core > Ventilated with reinforced flange (230/300)
 - Perform > Turbo rim
 - Gullets > Sintered - Hot pressed
 - Other > Great speed of cut & output
 - Adhesion > Less chipping & increased stability

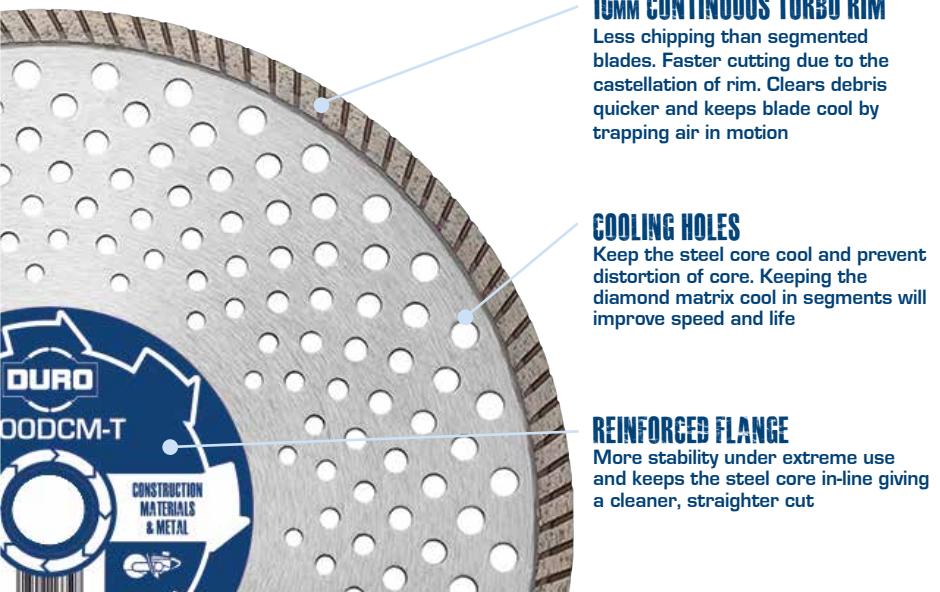

10MM CONTINUOUS TURBO RIM
Less chipping than segmented blades. Faster cutting due to the castellation of rim. Clears debris quicker and keeps blade cool by trapping air in motion

COOLING HOLES
Keep the steel core cool and prevent distortion of core. Keeping the diamond matrix cool in segments will improve speed and life

REINFORCED FLANGE
More stability under extreme use and keeps the steel core in-line giving a cleaner, straighter cut

SIZES & MOST RELEVANT MACHINE TYPE

DIMENSIONS	DCM-T	
(4") 115 x 22.23	115DCM-T ∞	
(5") 125 x 22.23	125DCM-T ∞	
(9") 230 x 23.23	230DCM-T ∞	
(12") 300 x 20.00	300DCM-T ∞	

ALTERNATIVE PRODUCTS



ORDER LINE: 01909 552470
EMAIL: INFO@DURO-YOKOTA.CO.UK

WWW.DURO-DIAMONDS.COM