




DIAMOND BLADES DSBM-PT BUILDING MATERIALS

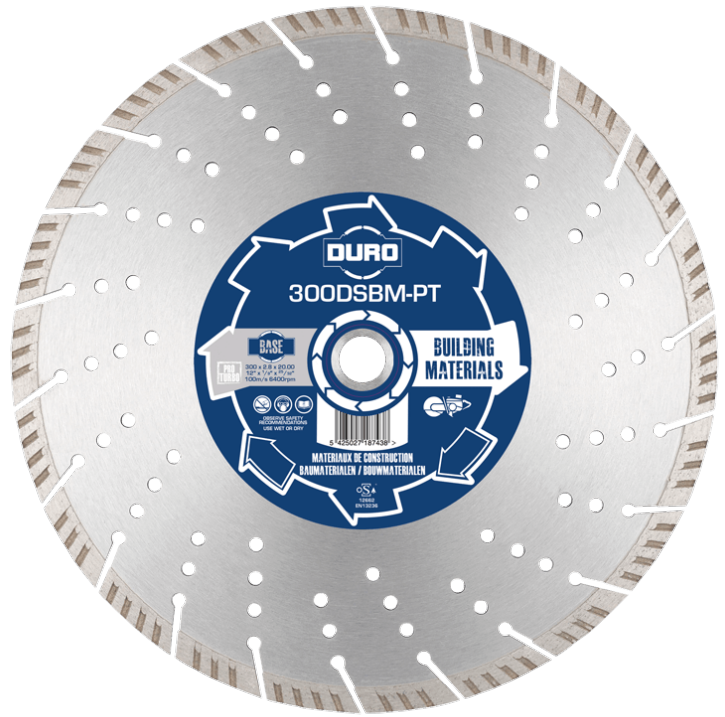

APPLICATIONS - BUILDING MATERIALS

SMALL METAL SECTIONS	
SMALL STEEL SECTIONS	
SG & GREY IRON	
PORCELAIN	
INDIAN STONE & GRANITE	
MARBLE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
REINFORCED CONCRETE - HEAVY	
REINFORCED CONCRETE - MEDIUM	
REINFORCED CONCRETE - LIGHT	
CONCRETE PRODUCTS	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
GENERAL BUILDING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
ASPHALT OVER CONCRETE	
GREEN CONCRETE	
CEMENT SCREED	
CELLULAR CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT	
ABRASIVE MORTAR	

- HIGHLY SUITED
- SUITABLE WITH RESERVATIONS
- NOT SUITABLE

GOOD PERFORMANCE & OUTPUT




USE ME FOR

All concrete products Inc. heavily reinforced
All bricks including class A engineering
Hard York stone / quartzite
Occasional use in Indian stone / granite / marble / slate/ small metal sections / asphalt over concrete / cellular concrete block

FEATURES

- Segments > 10mm Pro-Turbo
- Core > Ventilated
- Gullets > 30° keyhole
- Adhesion > Sintered - cold pressed
- Perform > Good speed of cut & output
- Other > Low vibration / Less chipping

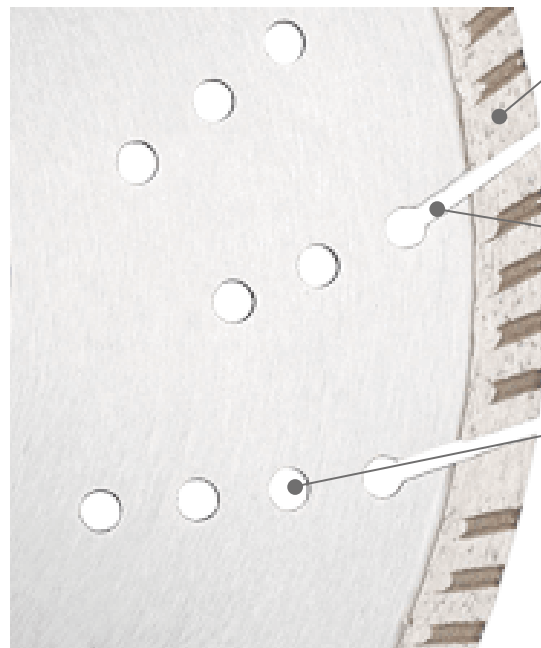

10MM TURBO SEGMENTS
Similar to turbo rims and referred to as castellated. Less chipping of material / faster cutting. Debris cleared quicker / blade kept cooler

30° KEYHOLE GULLETS
Similar to narrow gullets, results in less chipping of material being cut and reduction in vibration levels

COOLING HOLES
Prevents distortion & overheating of core. Keeping diamond matrix in segments cool improves speed and life

SIZES & MOST RELEVANT MACHINE TYPE

DIMENSIONS	DSBM-PT	
(4½") 115 x 22.23 mm	115DSBM-PT	
(5") 125 x 22.23 mm	125DSBM-PT	
(9") 230 x 22.23 mm	230DSBM-PT	
(12") 300 x 20.00 mm	300DSBM-PT	
(14") 350 x 20.00 mm	350DSBM-PT	

ALTERNATIVE PRODUCTS



ORDER LINE: 01909 552470
EMAIL: INFO@DURO-YOKOTA.CO.UK

WWW.DURO-DIAMONDS.COM