



SURFACE PREPARATION

**FLAP DISCS
SEMI FLEXIBLE SANDING DISCS
SURFACE PREPARATION DISCS
ABRASIVE GRINDING DISCS**

PLUS

STEEL & INOX

FLAP DISCS

USE ME FOR

Grinding & finishing of all mild carbon steel, stainless steel types and hard alloys
For heavy stock removal to surface blending. Ideal for grinding, de-burring, rust removal, edge grinding & weld seam blending. Use on angle grinders

FEATURES

Flap Grit	> Premium Ceramic
Grit Size	> 40 to 100
Backing	> Resin Fibre
Cloth	> Free of FE, S & CL <0.1%
Box Qty	> 10 Pcs

SIZE RANGE / CODE

(4½") 115 x 22.23 mm	GRIT SIZE 40	PD115-22-CFD-40G
(4½") 115 x 22.23 mm	GRIT SIZE 60	PD115-22-CFD-60G
(4½") 115 x 22.23 mm	GRIT SIZE 80	PD115-22-CFD-80G
(4½") 115 x 22.23 mm	GRIT SIZE 100	PD115-22-CFD-100G
(5") 125 x 22.23 mm	GRIT SIZE 40	PD125-22-CFD-40G
(5") 125 x 22.23 mm	GRIT SIZE 60	PD125-22-CFD-60G
(5") 125 x 22.23 mm	GRIT SIZE 80	PD125-22-CFD-80G
(5") 125 x 22.23 mm	GRIT SIZE 100	PD125-22-CFD-100G

CERAMIC FLAP DISCS

Vastly increased life / superior performance in hard alloys
Smooth, consistent finish with fast stock removal

STANDARD

STEEL & INOX

FLAP DISCS

USE ME FOR

Grinding & finishing of all mild carbon steel and stainless steel types
For heavy stock removal to surface blending. Ideal for grinding, de-burring, rust removal, edge grinding & weld seam blending. Use on angle grinders

FEATURES

Flap Grit	> Premium Zirconium
Grit Size	> 40 to 100
Backing	> Resin fibre
Cloth	> Free of FE, S & CL <0.1%
Box Qty	> 10 Pcs

SIZE RANGE / CODE

(4½") 115 x 22.23 mm	GRIT SIZE 40	D115-22-ZFD-40G
(4½") 115 x 22.23 mm	GRIT SIZE 60	D115-22-ZFD-60G
(4½") 115 x 22.23 mm	GRIT SIZE 80	D115-22-ZFD-80G
(4½") 115 x 22.23 mm	GRIT SIZE 100	D115-22-ZFD-100G
(5") 125 x 22.23 mm	GRIT SIZE 40	D125-22-ZFD-40G
(5") 125 x 22.23 mm	GRIT SIZE 60	D125-22-ZFD-60G
(5") 125 x 22.23 mm	GRIT SIZE 80	D125-22-ZFD-80G
(5") 125 x 22.23 mm	GRIT SIZE 100	D125-22-ZFD-100G

ZIRCONIUM FLAP DISCS

Lightweight, low vibration & noise
Smooth, consistent finish with fast stock removal



SEMI FLEXIBLE SANDING DISCS

DCA-SFD

USE ME FOR

Heavy duty sanding of masonry, GRP, fibreglass and some plastics. Can also be used for light stone grinding and on hard wood

For use on angle grinders

FEATURES

- Grit > Silicon Carbide
- Grit Size > 24 to 60
- Backing > Vulcanised fibre
- Box Qty > 10 Pcs

Use With > Must be used with a backing pad (Page 134)

SIZE RANGE / CODE

(4 1/2") 115 x 22.23 mm	GRIT SIZE 24	DCA-SFD-115x22-S24
(4 1/2") 115 x 22.23 mm	GRIT SIZE 36	DCA-SFD-115x22-S36
(4 1/2") 115 x 22.23 mm	GRIT SIZE 60	DCA-SFD-115x22-S60
(5") 125 x 22.23 mm	GRIT SIZE 24	DCA-SFD-125x22-S24
(5") 125 x 22.23 mm	GRIT SIZE 36	DCA-SFD-125x22-S36
(5") 125 x 22.23 mm	GRIT SIZE 60	DCA-SFD-125x22-S60
(7") 178 x 22.23 mm	GRIT SIZE 24	DCA-SFD-178x22-S24
(7") 178 x 22.23 mm	GRIT SIZE 36	DCA-SFD-178x22-S36
(7") 178 x 22.23 mm	GRIT SIZE 60	DCA-SFD-178x22-S60



SURFACE PREPARATION DISCS

DCA-SPD

USE ME FOR

Removal of rust, paints and other coatings. Also GRP, fibre glass and plastics. Very strong and durable with the ability to absorb vibration and ensuring minimal risk of work piece scratching. For use on 115 mm angle grinders

FEATURES

- Grit > Aluminium Oxide
- Weight > Lightweight
- Backing > Fibreglass
- Coating > Synthetic resin
- Box Qty > 10 Pcs

SIZE RANGE / CODE

(4 1/2") 115 x 22.23 mm	DCA-SPD-115x22-NW
-------------------------	-------------------



PLUS

METAL, STEEL & INOX - DEPRESSED CENTRE GRINDING- ANGLE GRINDERS

USE ME FOR

Professional level grinding with angle grinders
All carbon steel types
All stainless steel types

> EN12413

FEATURES

Type	> Depressed Centre - Grind
Layers	> 3 Reinforced
Max Speed	> 80 m/s
Material	> Coated Alum Oxide - Free FE, S & CL <0.1%
Package	> Boxes of 10

PROFESSIONAL LEVEL GRINDING DISCS



DIMENSIONS	SPECIFICATION	PART NO.
(4 1/2") 115 x 6.0 x 22.23 mm	A30BF Inox Duo	PD115-22-ADMI-6.0
(5") 125 x 6.0 x 22.23 mm	A30BF Inox Duo	PD125-22-ADMI-6.0
(9") 230 x 6.0 x 22.23 mm	A30BF Inox Duo	PD230-22-ADMI-6.0



STANDARD

METAL, STEEL & INOX - DEPRESSED CENTRE GRINDING- ANGLE GRINDERS


USE ME FOR

Grinding with angle grinders
All carbon steel types
All stainless steel types

EN12413

FEATURES

Type	> Depressed Centre - Grind
Layers	> 3 Reinforced
Max Speed	> 80 m/s
Material	> Coated Alum Oxide - Free FE, S & CL <0.1%
Package	> Boxes of 10

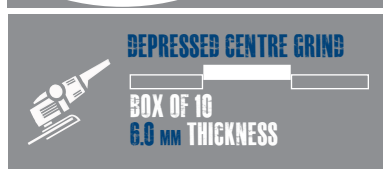

DIMENSIONS	SPECIFICATION	PART NO.
(4") 100 x 6.0 x 16.00 mm	A30BF Inox Duo	D100-16-ADMI-6.0
(4 1/2") 115 x 6.0 x 22.23 mm	A30BF Inox Duo	D115-22-ADMI-6.0
(5") 125 x 6.0 x 22.23 mm	A30BF Inox Duo	D125-22-ADMI-6.0
(7") 180 x 6.0 x 22.23 mm	A30BF Inox Duo	D180-22-ADMI-6.0
(9") 230 x 6.0 x 22.23 mm	A30BF Inox Duo	D230-22-ADMI-6.0

STANDARD

STONE GRINDING - DEPRESSED CENTRE GRINDING- ANGLE GRINDERS



USE ME FOR

Grinding with angle grinders
All masonry types
All concrete types

FEATURES

Type	> Depressed Centre - Grind
Layers	> 3 Reinforced
Max Speed	> 80 m/s
Material	> Silicon carbide
Package	> Boxes of 10

DEPRESSED CENTRE GRIND



BOX OF 10
6.0 mm THICKNESS

DIMENSIONS	SPECIFICATION	PART NO.
(4") 100 x 6.0 x 16.00 mm	C30BF	D100-16-ADS-6.0
(4 1/2") 115 x 6.0 x 22.23 mm	C30BF	D115-22-ADS-6.0
(5") 125 x 6.0 x 22.23 mm	C30BF	D125-22-ADS-6.0

DRYWALL SANDING

- 225 mm Drywall sanding sheets & velcro sponge pad for the SB9 dry wall sander are listed on page 236
- Grit types from 80 to 220 (20 qty packs)





GRIT SIZES FOR SANDING WOOD / METAL

- > For maximum stock removal when sanding, start with a low grit abrasive - referred to as Coarse
- > Choose the grit required based on the condition of your wood or metal and work up in grit size until the required finish is achieved

GRIT SIZE	GRADE	APPLICATIONS	APPLICATIONS
40 - 60	Coarse	Heavy Stock Removal	Edge chamfering, bevelling, weld blending
80 - 100	Medium Coarse		De-burring, de-flashing, rust removal, blending
120 - 150	Medium		Cleaning & finishing
180 - 220	Fine		Cleaning & finishing
240+	Very Fine	Fine Finish	Cleaning & finishing

DURO ABRASIVE PRODUCTS APPLICATION CHART

PRODUCT	Grit Sizes	Soft Wood	Hard Wood	Plaster	Masonry / Stone	Non Ferrous Metal	Stainless Steel	Ferrous Steel	Rust / Paint	GRP	Plastic	Fibre-glass
Edge Sanding Discs	24-120	✓	✓									
Floor Sanding Sheets	24-120	✓	✓									
Alu Oxide Sanding Discs	24-120	✓	✓			✓						
Zirconium Sanding Discs	36-60	✓	✓			✓	✓	✓				
Paper Rolls	60-120	✓	✓	✓		✓		✓	✓			
Emery Rolls	40-150					✓			✓			
Ventilated Sanding Sheets	60-120	✓	✓	✓		✓			✓			
Ventilated Sanding Discs	60-120	✓	✓	✓		✓			✓			
Sanding Belts	40-120	✓	✓	✓		✓			✓			
Ceramic Flap Discs	40-100					✓	✓	✓	✓			
Zirconium Flap Discs	40-100					✓	✓	✓	✓			
Semi Flexible Sanding Discs	24-160		✓		✓					✓	✓	✓
Surface Preparation Discs	N/A								✓	✓	✓	✓
Metal Grind Discs	N/A					✓	✓	✓				
Stone Grind Discs	N/A				✓							